
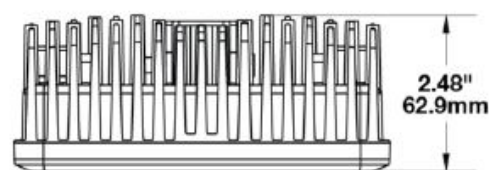



Articolo 1603641

12-36 V, Linea Blu

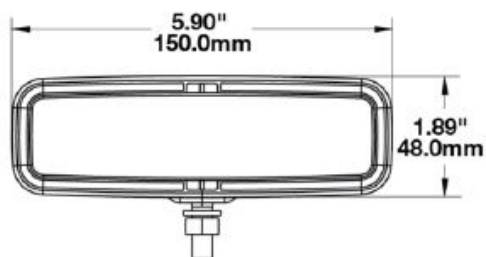

Dati tecnici


Alimentazione (V), nominale	12-36
Alimentazione (V), funzionale	10-45
Assorbimento (W)	12,0-16,2
Temperatura (°C)	da -40 a +65
Luminosità (lm theor.)	496
Luminosità (lm eff.)	110
Luminosità (cd)	1200
Grado di protezione	IP69K
Contrassegno	UL
Resistenza elettromagnetica	ECE (Reg. 10)
Protezione ai disturbi	330 V @ 1 Hz-100 Impulsi
Fissaggio	Staffa di montaggio speciale
Connessione presa	Deutsch (DT04-2P)
Connessione spina	Deutsch (DT06-2S)
Protezione all'inversione di polarità	Sì
Cavo Nero	Massa
Cavo Rosso	Spia luminosa
Materiale custodia	Alluminio
Materiale diffusore	Polycarbonato
Colore custodia	Nero
Colore cornice	Nero
Colore diffusore	Chiaro

16.10.2019

LED Safety Lights - Model 793

PRODUCT INFORMATION

Description	12-36V LED Red, Short Bracket
Height	48.00 mm / 1.89 in
Width	150.00 mm / 5.91 in
Depth	63.00 mm / 2.48 in
Shape	Rectangular
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Aluminum
Housing Color	Black
Bezel Color	Black
Mounting Hardware Description	(x1) 5/16"-18 x 1.00" Mounting Bolt Bracket
Mounting Type	Pedestal
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Connector or Wiring	Deutsch DT04-2P
Mating Connector	Deutsch DT06-2S with harness included with flying leads
Product Weight	0.79 lbs / 0.36 kgs
Shipping Weight	1.10 lbs / 0.5 kgs

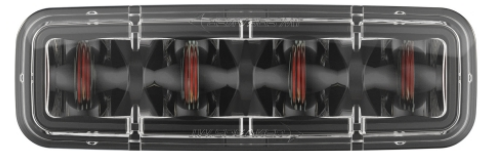


Print date: 2020-02-26

© 2020 J.W. Speaker Corporation • Germantown, WI U.S.A.

J.W. SPEAKER®
Engineered. Lighting. Solutions.

LED Safety Lights - Model 793

PRODUCT DIMENSIONS

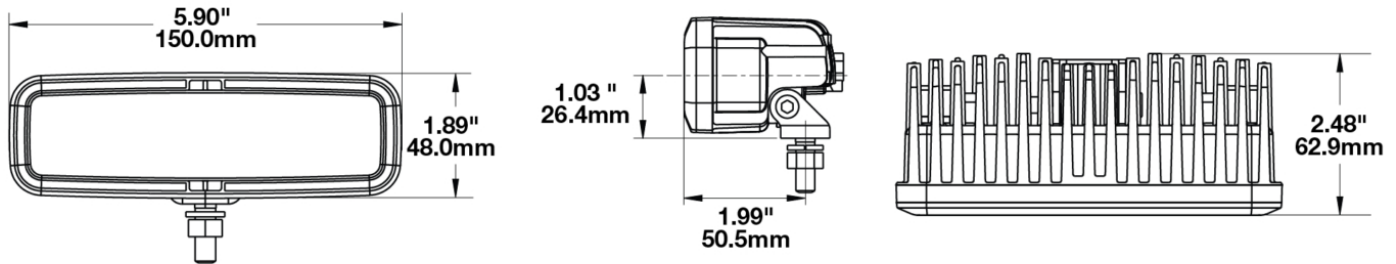

ELECTRICAL SPECIFICATIONS

Input Voltage	12-36V DC
Operating Voltage	10-45V DC
Transient Spike Protection	330V Peak @ 1 HZ-100 Pulses
Black Wire	Ground
Red Wire	Power
Current Draw	1.60A @ 12V DC 0.60A @ 24V DC 0.57A @ 36V DC

Print date: 2020-02-26

© 2020 J.W. Speaker Corporation • Germantown, WI U.S.A.

J.W. SPEAKER
Engineered. Lighting. Solutions.

LED Safety Lights - Model 793

REGULATORY STANDARDS COMPLIANCE




Buy America Standards
IEC IP67
Tested to ECE Reg. 10
(Radiated Emissions only)

Eco Friendly
IEC IP69K
UL Recognized

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 1,130
Effective Lumen Output 317
Candela Output 3,150
Beam Pattern(s) Warning - Keep Out Zone

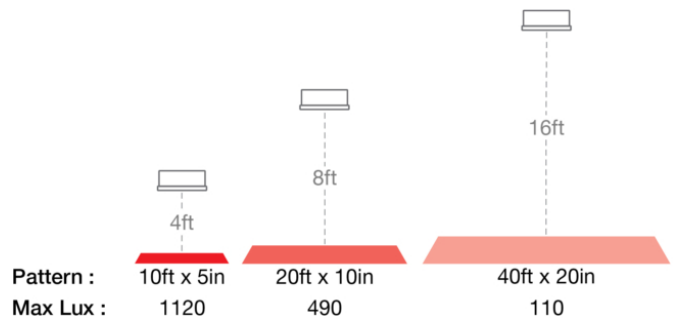

APPLICATIONS



Print date: 2020-02-26

© 2020 J.W. Speaker Corporation • Germantown, WI U.S.A.

